



Fitting type: Undermount

Sink handing: Not handed

Finish style: Brushed steel

- **Min. base unit (bowl, tap & overflow only):** 450 mm
- **Packaged size L x W x D:** 585 x 560 x 270mm
- **Supplied boxed or sleeved:** Boxed
- **Boxed weight:** 4.16 kg
- **Sink only weight:** 1.88 kg

- Thick gauge 18/10 stainless steel construction throughout
- Uber square rectilinear styling
- Ideal for use as a 2nd food preparation sink
- Smooth lined luxury Orbit waste supplied as standard
- Stylish zero radius construction
- Taphole provision to accept Switch filter diverter? No, Fit through worktop

Included parts:



1 x AX1001 (m)
90mm (1.5") Orbit manual basket
strainer waste - short bolt



1 x AX1006 (m)
Rectangular overflow pipework



1 x AX1008 (m)
1.0 Bowl pipework




1 x AX4001 (m)
Fitting & care instructions & data sheet
- st/st undermount



1 x AX1017 (m)
Undermount fixing clips x 4

Recommended accessories:



1 x AX2501
Silicone drainer mat 330 x 390mm



1 x AX1503
Theorem Colander



1 x AX2502 or AX2503
High & Dry drainer rack - Green & grey
or White & grey

All accessories can be purchased directly from www.abode-shop.co.uk or phone 01226 283434

Materials and workmanship warranty summary:

- Sink materials & workmanship 10 years.
- Waste kits 1 year.
- Connecting pipework 1 year.

Care instructions:

- Clean the products regularly using soapy water and a non abrasive cloth, regular cleaning will prevent the build up of lime scale and dirt.
- Avoid contact with corrosive or abrasive substances.
- After cleaning rinse thoroughly with clean water then dry.
- For more detail see supplied booklet or www.abode.eu





EN13310:2003
Domestic kitchen sink made of Stainless steel

Cleanability: Pass
Load resistance: NPD / NA
(applies to wall hung sinks only)
Durability: Pass
For more information see www.abode.eu/ce.html


Product dimensions and installation information: note:



symbol indicates position of acoustic pad on stainless products.

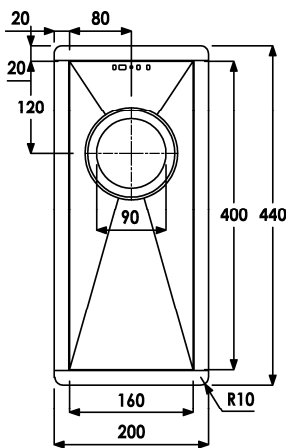

UNDERMOUNT CUT OUT

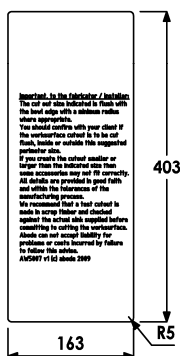

Refer to the Fabricator / Installer
The cut out area indicated is flush with
the bowl edge with a minimum radius
where appropriate.
You should confirm with your client if
the worktop cutout is to be cut
flush, inside or outside the suggested
perimeter size.
If you create the cutout smaller or
larger than the indicated size then
some accessories may not fit correctly.
All details are provided in good faith
and within the tolerances of the
manufacturing process.
We recommend that a test cutout is
made in scrap timber and checked
against the actual sink supplied before
committing to cutting the worktop.
Abode can not accept liability for
problems or costs incurred by failure
to follow this advice.
AW5007 v1.0 04/04/2009

Overall product size: 200 x 440 x 155 corner radius 10mm

Tap hole(s) detail: None

Compatibility with large square taps: No known incompatibilities

Wastehole(s) detail (mm): 90 / N/A / N/A (nb. 90mm wastes accept a waste disposal unit)

Min. base unit (refers to space required for bowl, tap and overflow only): fits 450mm carcass

Min. Recessed fitting width: required (bowl(s), tap and overflow): 160mm

***Worktop cut out size:** 163x403 corner radius 5mm, for .DXF cut files please see www.abode.eu

Min. & Max worktop depth or clip depth reach range: 0 - 5mm

Fitting template supplied? No, use cut out instructions as supplied


Dishwasher under drainer? Distance from top of worktop to underside of the drainer 0mm

Other: No known incompatibilities



***Important, fabricator / installer notes for undermount sinks:**

The cut out size indicated is aligned with outside edge of the bowl top radius (see example below).



You should confirm with your client if the worksurface cutout is to be cut flush, inside or outside this suggested perimeter shape & size.

If you create the cutout smaller or larger than the indicated size then the fit of the accessories may be affected and should be physically checked.

General:

All details are provided in good faith but do not include the tolerances of the material or manufacturing process.

We request that a test cutout is made in scrap timber and checked against the actual sink to be installed before committing to cutting the final worksurface.

Abode can not accept liability for problems or costs incurred by failure to follow this request.

Note: the dimensions on ceramic fireclay products are subject to wider tolerances due to the nature of this natural material and the firing process.

CAD cutout files can be downloaded from www.abode.eu

Bowl details: (sizes in mm unless specified otherwise)

Bowl 1 (typically main bowl):

Bowl 1 size L x W x D (mm): 160 x 400 x 148

Bowl 1 construction: Welded, 1.00mm

Bowl 1 floor radius (mm): 1

Bowl 1 Wastehole diameter (mm): 90

Bowl 1 overflow: Slotted, barcode pattern

Bowl 1 texture: Brushed stainless

Bowl 1 apx. volume (litres): 6.30

Bowl 2 (typically 1/2 or 3/4 bowl):

Bowl 2 size L x W x D (mm): N/A x N/A x N/A

Bowl 2 construction: N/A, N/Amm

Bowl 2 floor radius (mm): N/A

Bowl 2 Wastehole diameter (mm): N/A

Bowl 2 overflow: N/A

Bowl 2 texture: N/A

Bowl 2 apx. volume (litres): N/A

Bowl 3:

Bowl 3 size L x W x D (mm): N/A x N/A x N/A

Bowl 3 construction: N/A, N/Amm

Bowl 3 floor radius (mm): N/A

Bowl 3 Wastehole diameter (mm): N/A

Bowl 3 overflow: N/A

Bowl 3 texture: N/A

Bowl 3 apx. volume (litres): N/A

Important: Please retain this sheet for future use