

Product features:

- Metal & ABS construction
- Thermostatic valve for safety & comfort
- Leading design features requiring high pressure
- 1/4 turn lock on diverter to handheld showerhead
- Rub clean anti limescale spray nozzles


Packaged properties:

Box length: 940 mm **Box depth:** 115 mm
Box width: 550 mm **Boxed weight:** tbc Kg kg

Includes pop up waste?: No

Additional comments:

Product dimensions:

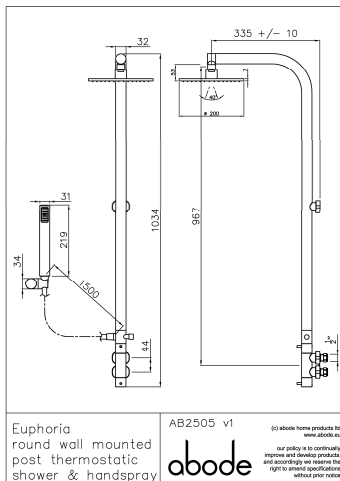

- **Overall Height / projection:** 1034 mm
- **Exit reach:** 335 ± 10 mm
- **Exit height:** 967 mm
- **Centre distance(s):** 45 mm
- **Base diameter(s):** 59 x 38 mm
- **Product mounted where:** Wall
- **Recommended hole diameter:**
- **Min. fitting depth required:** 50 mm
- **Max. surface depth:**

Product flow characteristics:

- **Min / Max water pressure:** 1.25 / 5 bar
- **Part G mixed flow rate at 3 bar (l/m):** 16.7

- **Max water temperature:** 70° C
- **Product flow characteristics:**
- **Aerator type:**
- **Includes output diverter?:** N/A
- **Control valve type:** Thermostatic ()
- **Non return valve position:** h&c inlet & shower output
- **Mesh particle filter size:** 0.60 mm
- **Inlet / outlet size:** 1/2" M /
- **Inlet type / length:** Fixed / mm
- **Shower hose type / length:** N/A / N/A

Flow graph not available

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives